

PRODUCT LINE

BROCHURE: 2025



FAITH - VISION - WORK





SCAN for MORE



DESIGN
ENGINEER
BUILD & SERVICE
...It's What We Do!

WE ARE TAYLOR

DEPENDABLE HIGH CAPACITY LIFT TRUCKS

For nearly a century, Taylor Machine Works, Inc.—known around the world for our iconic “Big Red” lift trucks—has been a trusted leader in the material handling industry. Engineered and built in the USA, Taylor equipment is designed to perform in the most demanding environments, from steel mills and lumber yards to ports and intermodal terminals. Our commitment to durability, reliability, and performance has earned Taylor a reputation for excellence across generations of customers.

What truly sets Taylor apart is our factory direct model. With 35 factory direct stores across the 13 states, we provide unmatched parts availability, 24/7 service, and Taylor Master Certified technical support directly from the source. Our highly trained technicians ensure faster response times and personalized support, helping you maximize uptime and keep operations running smoothly.

Taylor’s reach extends far beyond U.S. borders, with a global footprint in over 80 countries. Taylor equipment plays a vital role in industries such as mining, oil and gas, agriculture, logistics, and more. Supported by a robust dealer network, Taylor delivers the same level of quality, service, and dependability worldwide.

When performance matters and downtime is not an option, Taylor lift trucks deliver. Backed by over 95 years of innovation and a team dedicated to your success, “Big Red” stands ready to meet the toughest challenges in material handling—anywhere in the world.

WE ARE TAYLOR

Design, Engineer, Build, & Service
...It’s What We Do!

TABLE OF CONTENTS

X SERIES	5	GTX SERIES	27
24" LC: 18K - 28K Capacity	6	GTX FORKLIFTS: 44K - 73K Capacity	28
24" LC: 28K - 36K Capacity	7	GTX FORKLIFTS: 83K - 105K Capacity	29
36" LC: 18K - 65K Capacity	8	GLOBAL EMPTY HANDLERS: 5-9 High Stacking	30
48" LC: 30K - 70K Capacity	9	GLOBAL LOADED HANDLERS: 3-6 High Stacking ...	31
48" LC: 80K - 125K High Capacity	10	GLOBAL REACH STACKERS: 26 - 99,000-lbs	31
24"- 48" LC: Big Wheels & Offset Cab	11	ELECTRIC MODELS	33
36"- 50" LC: Rigger, RoRo, & Raised	12	ZH 36"- 48" LC: 36K - 100K Capacity	34
36"- 48" LC: Removable Counterweight	12	ZEC Series: Empty Container Handlers	35
80K - 100K: Log Stackers	13	ZLC Series: Loaded Container Handlers	35
SPECIAL BUILT: Tow & Pallet	13	ZRS Series: Reach Stackers	35
CONTAINERS	15	GTE 24" LC: 5K - 18K Capacity	36
XEC 15K- 20K: Empty Container Handlers	16	GTX Series: Electric Empty Handlers	37
XLC 88K- 90K: Loaded Container Handlers	16	GTEZ Series: Electric Empty Handlers	37
XRS 88K- 120K: Reach Stackers	17	GRZ Series: Electric Reach Stackers	37
CUSHION TIRE	19		
XC 24" LC: 18K - 35K Capacity	20		
XHC 24"- 36" LC: Cushion Tire & Extendable	21		
GT SERIES	23		
GT 24" LC: 4K - 18K Capacity	24		
GTC 24" LC: 4K - 6.5K Capacity	24		
GTR 24" LC: 4K - 12K Capacity	25		
GTR 24"-48" LC: 36K - 65K Capacity	25		

X SERIES

PNEUMATIC TIRE



24" LC: 18K - 28K Capacity



X160

PNEUMATIC LIFT TRUCK

Cap: 16K lbs (7K kg)
W.B.: 104 in (2641 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 60-in pin-type "C" carriage
- 2.5" x 6" x 48" pin mounted forks
- Cummins F3.8-C134 Stage 5
- Dana TC-20 3-speed transmission
- Kessler D-41 HD drive axle
- 8.25x15 18pr bias drive/steer tires



X175

PNEUMATIC LIFT TRUCK

Cap: 17.5K lbs (7.9K kg)
W.B.: 104 in (2641 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 60-in pin-type "C" carriage
- 2.5" x 6" x 48" pin mounted forks
- Cummins F3.8-C134 Stage 5
- Dana TC-20 3-speed transmission
- Kessler D-41 HD drive axle
- 8.25x15 18pr bias drive/steer tires



X180S

PNEUMATIC LIFT TRUCK

Cap: 18K lbs (8K kg)
W.B.: 101 in (2565 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 2.75" x 7" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 10.00x20 24pr bias drive/steer tires



X200S

PNEUMATIC LIFT TRUCK

Cap: 20K lbs (9K kg)
W.B.: 101 in (2565 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 2.75" x 7" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 10.00x20 24pr bias drive/steer tires



X220S

PNEUMATIC LIFT TRUCK

Cap: 22K lbs (10K kg)
W.B.: 101 in (2565 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 2.75" x 7" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 10.00x20 24pr bias drive/steer tires



X250S

PNEUMATIC LIFT TRUCK

Cap: 25K lbs (11K kg)
W.B.: 110 in (2794 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 2.75" x 7" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 10.00x20 24pr bias drive/steer tires



X250M

PNEUMATIC LIFT TRUCK

Cap: 25K lbs (11K kg)
W.B.: 121 in (3073 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 2.75" x 7" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 10.00x20 24pr bias drive/steer tires



X280S

PNEUMATIC LIFT TRUCK

Cap: 28K lbs (13K kg)
W.B.: 110 in (2794 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 12.00x20 24pr bias drive/steer tires

24" LC: 28K - 36K Capacity



X280M

PNEUMATIC LIFT TRUCK

Cap: 28K lbs (13K kg)
W.B.: 121 in (3073 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 12.00x20 24pr bias drive/steer tires



X300M

PNEUMATIC LIFT TRUCK

Cap: 30K lbs (14K kg)
W.B.: 121 in (3073 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 12.00x20 24pr bias drive/steer tires



X330S

PNEUMATIC LIFT TRUCK

Cap: 33K lbs (15K kg)
W.B.: 110 in (2794 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-Ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 12.00x20 24pr bias drive/steer tires



X360M

PNEUMATIC LIFT TRUCK

Cap: 36K lbs (16K kg)
W.B.: 121 in (3073 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 12.00x20 24pr bias drive/steer tires



X300S

PNEUMATIC LIFT TRUCK

Cap: 30K lbs (14K kg)
W.B.: 110 in (2794 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 12.00x20 24pr bias drive/steer tires



X330M

PNEUMATIC LIFT TRUCK

Cap: 33K lbs (15K kg)
W.B.: 121 in (3073 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 12.00x20 24pr bias drive/steer tires



X330SL

PNEUMATIC LIFT TRUCK

Cap: 33K lbs (15K kg)
W.B.: 110 in (2794 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 9.8-ft. Direct Lift mast
- 100-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 12.00x20 24pr bias drive/steer tires



X360L

PNEUMATIC LIFT TRUCK

Cap: 36K lbs (16K kg)
W.B.: 138 in (3505 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks
- Cummins QSB4.5-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 12.00x20 24pr bias drive/steer tires

36" LC: 18K - 65K Capacity



XH180 PNEUMATIC LIFT TRUCK

Cap: 18K lbs (8K kg)
W.B.: 104 in (2641 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 72-in pin-type "C" carriage
- 2.75" x 7" x 72" pin mounted forks
- Cummins F3.8-C134 Stage 5
- Dana TC-20 3-speed transmission
- Kessler D-41 HD drive axle
- 8.25x15 18pr bias drive/steer tires



XH180 Hydro PNEUMATIC LIFT TRUCK

Cap: 18K lbs (8K kg)
W.B.: 104 in (2641 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 72-in pin-type "C" carriage
- 2.75" x 7" x 72" pin mounted forks
- Cummins F3.8-C134 Stage 5
- RexRoth hydrostatic transmission
- Kessler D-41 HD drive axle
- 8.25x15 18pr bias drive/steer tires



X450S PNEUMATIC LIFT TRUCK

Cap: 45K lbs (20K kg)
W.B.: 144 in (3657 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 4.5" x 8.5" x 72" pin mounted forks
- Cummins QSF 6.7L 225hp
- Dana TE-17 3-speed transmission
- Axletech PRLC-1794W drive axle
- 14.00x25 20pr bias drive/steer tires



X520S PNEUMATIC LIFT TRUCK

Cap: 52K lbs (24K kg)
W.B.: 144 in (3657 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 5" x 10" x 72" pin mounted forks
- Cummins QSF 6.7L 225hp
- Dana TE-17 3-speed transmission
- Axletech PRLC-1794W drive axle
- 14.00x25 20pr bias drive/steer tires



XN520S PNEUMATIC LIFT TRUCK

Cap: 52K lbs (24K kg)
W.B.: 154 in (3911 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 64-in. Rigid mast
- 44-in direct lift coil ram carriage
- 3.5" x 12" x 50" pin mounted forks
- Cummins QSF 6.7L 225hp
- Dana TE-17 3-speed transmission
- Kessler D-91W drive axle
- 14.00x25 24pr bias drive/steer tires



X550S PNEUMATIC LIFT TRUCK

Cap: 55K lbs (25K kg)
W.B.: 144 in (3657 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 5" x 10" x 72" pin mounted forks
- Cummins QSB 6.7L 225hp
- Dana TE-17 3-speed transmission
- Axletech PRLC-1794W drive axle
- 14.00x25 20pr bias drive/steer tires



X650S PNEUMATIC LIFT TRUCK

Cap: 65K lbs (29.5K kg)
W.B.: 164 in (4165 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" carriage
- 5" x 12" x 72" pin mounted forks
- Cummins QSL9 250hp
- Dana TE-17 3-speed transmission
- Axletech PRLC-3806 HD drive axle
- 16.00x25 24pr bias drive/steer tires

48" LC: 30K - 70K Capacity



XH300L PNEUMATIC LIFT TRUCK

Cap: 30K lbs (13.6K kg)
W.B.: 148 in (3759 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 4" x 8" x 96" pin mounted forks
- Cummins QSB6.7-C173 4F
- Dana TE-14 3-speed transmission
- Kessler D-81W HD drive axle
- 12.00x20 24pr bias drive/steer tires



XH370M PNEUMATIC LIFT TRUCK

Cap: 37K lbs (16.8K kg)
W.B.: 148 in (3759 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 4.5" x 8.5" x 96" pin mounted forks
- Cummins QSB6.7-C173 4F
- Dana TC-14 3-speed transmission
- Kessler D-81 drive axle
- 12.00x20 24pr bias drive/steer tires



XH450M PNEUMATIC LIFT TRUCK

Cap: 45K lbs (20K kg)
W.B.: 160 in (4064 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 4.5" x 8.5" x 72" pin mounted forks
- Volvo 7.7L TAD871VE 248hp
- Dana TE-17 3-speed transmission
- Axletech PRLC1794 HD drive axle
- 14.00x25 24pr bias drive/steer tires



XH650L PNEUMATIC LIFT TRUCK

Cap: 65K lbs (29.5K kg)
W.B.: 180 in (4572 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" carriage
- 5" x 12" x 96" pin mounted forks
- Cummins QSL9 250hp
- Dana TE-17 3-speed transmission
- Axletech PRLC-3806 HD drive axle
- 16.00x25 28pr bias drive/steer tires



XH350L - 360L PNEUMATIC LIFT TRUCK

Cap: 35K-36K lbs (15.9-16.3 kg)
W.B.: 148 in (3759 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 4" x 8" x 96" pin mounted forks
- Cummins B 6.7L 173hp Stage 5
- Dana TE-14 3-speed transmission
- Kessler D-81W HD drive axle
- 12.00x20 24pr bias drive/steer tires



XH400L PNEUMATIC LIFT TRUCK

Cap: 40K lbs (18K kg)
W.B.: 158 in (4013 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 4.5" x 8.5" x 96" pin mounted forks
- Cummins B6.7-C173 Stage 5
- Dana TE-14 3-speed transmission
- Kessler D-81 drive axle
- 12.00x20 24pr bias drive/steer tires



XH550M PNEUMATIC LIFT TRUCK

Cap: 55K lbs (25K kg)
W.B.: 170 in (4318 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 5" x 10" x 96" pin mounted forks
- Volvo 7.7L TAD871VE 248hp
- Dana TE-17 3-speed transmission
- Axletech PRLC1794 HD drive axle
- 14.00x25 24pr bias drive/steer tires



XH700L PNEUMATIC LIFT TRUCK

Cap: 70K lbs (32K kg)
W.B.: 190 in (4826 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" carriage
- 5" x 12" x 96" pin mounted forks
- Cummins QSL9 250hp
- Dana TE-17 3-speed transmission
- Axletech PRLC-3806 HD drive axle
- 16.00x25 28pr bias drive/steer tires

48" LC: 80K - 125K High Capacity



X800S - X900S HIGH CAPACITY LIFT TRUCK

Cap: 80K-90K lbs (36K-41K kg)
W.B.: 195 in (4953 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" carriage
- 6" x 12" x 96" pin mounted forks
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-30 5-speed transmission
- Kessler D-102 drive axle
- 18.00x25 32pr bias drive/steer tires



X900M HIGH CAPACITY LIFT TRUCK

Cap: 90K lbs (41K kg)
W.B.: 215 in (5461 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" carriage
- 6" x 12" x 96" pin mounted forks
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-32 4-speed transmission
- Kessler D-102 drive axle
- 18.00x25 40pr bias drive/steer tires



X800L - X925L HIGH CAPACITY LIFT TRUCK

Cap: 80K-92.5K lbs (36K-42.5 kg)
W.B.: 225 in (5715 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" carriage
- 6" x 12" x 96" pin mounted forks
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-30 5-speed transmission
- Kessler D-102 drive axle
- 18.00x25 40pr bias drive/steer tires



XH925L HIGH CAPACITY LIFT TRUCK

Cap: 92.5K lbs (42K kg)
W.B.: 225 in (5715 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 15-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" carriage
- 6" x 12" x 96" pin mounted forks
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-30 5-speed transmission
- Kessler D-106 drive axle
- 18.00x33 40pr bias drive/steer tires



XH1000 HIGH CAPACITY LIFT TRUCK

Cap: 100K lbs (45K kg)
W.B.: 225 in (5715 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 15-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" carriage
- 6" x 12" x 96" pin mounted forks
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-30 5-speed transmission
- Kessler D-106 drive axle
- 18.00x33 36pr bias drive/steer tires



X1100 HIGH CAPACITY LIFT TRUCK

Cap: 110K lbs (50K kg)
W.B.: 257 in (6527 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- Direct lift mast
- 168-in pin-type "C" carriage
- 7.5" x 12" x 96" pin mounted forks
- 12.8 L-TAD1372VE- 428 Tier 4F
- Dana 6422 4-sp. APC
- Kessler D-106 drive axle
- D 21.00x35 42pr - S 18.00x33 36pr



X1200 - X1200L

Cap: 120K lbs (54K kg)
W.B.: 257 in (6527 mm)
W.B.: 310 in (7874 mm)
L.C.: 48 in (1219 mm)
L.C.: 50 in (1270 mm)

STANDARD FEATURES:

- Direct lift mast
- 168-in pin-type "C" carriage
- 7.5" x 12" x 96" pin mounted forks
- 12.8 L-TAD1372VE- 428 Tier 4F
- Dana 6422 4-sp. APC
- Kessler D-106 drive axle
- D 21.00x35 42pr / S 18.00x33 36pr



X1250 HIGH CAPACITY LIFT TRUCK

Cap: 125K lbs (57K kg)
W.B.: 288 in (7315 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13-ft. Ultra-Vu rigid mast
- 168-in pin-type "C" carriage
- 6.5" x 15" x 144" pin mounted forks
- Cummins X12 (335 Hp) S5
- Dana 6422 4-sp. APC
- Kessler D-106 drive axle
- D 21.00x35 42pr / S 18.00x33 40pr

24"- 48" LC: Big Wheels & Offset Cab



XB180S, 200S

BIG WHEEL LIFT TRUCK

Cap: 18K lbs (8K kg)
Cap: 20K lbs (9K kg)
W.B.: 110 in (2794 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 2.75" x 7" x 48" pin mounted forks

- Cummins QSB 6.7L 173hp
- Dana TE-14 4-speed transmission
- Kessler D-81 drive axle
- 14.00x25 24pr bias drive tires
- 10.00x20 18pr bias drive tires



XB300L, 360L

BIG WHEEL LIFT TRUCK

Cap: 30K lbs (14K kg)
Cap: 36K lbs (16K kg)
W.B.: 140 in (3556 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks

- Cummins QSB 6.7L 173hp
- Dana TE-14 4-speed transmission
- Kessler D-81 drive axle
- 18.00x25 28pr bias drive tires
- 12.00x20 24pr bias drive tires



XHO-300L

OFFSET CAB

Cap: 30K lbs (13.6K kg)
W.B.: 148 in (3759 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 4" x 8" x 96" pin mounted forks

- Cummins QSB 6.7L 173hp
- Dana TE-14 4-speed transmission
- Kessler D-81W drive axle
- 12.00x20 24pr bias drive/steer tires



XHO-360L

OFFSET CAB

Cap: 36K lbs (16.3K kg)
W.B.: 148 in (3759 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 4" x 8" x 96" pin mounted forks

- Cummins QSB 6.7L 173hp
- Dana TE-14 4-speed transmission
- Kessler D-81W drive axle
- 12.00x20 24pr bias drive/steer tires



XB250M

BIG WHEEL LIFT TRUCK

Cap: 25K lbs (11.3K kg)
W.B.: 140 in (3556 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks

- Cummins QSB 6.7L 173hp
- Dana TE-14 4-speed transmission
- Kessler D-81 drive axle
- 16.00x25 24pr bias drive tires
- 12.00x20 28pr bias drive tires



XO-360L

OFFSET CAB

Cap: 36K lbs (16.3K kg)
W.B.: 138 in (3505 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 84-in pin-type "C" carriage
- 3.5" x 8" x 48" pin mounted forks

- Cummins QSB 6.7L 173hp
- Dana TE-14 4-speed transmission
- Kessler D-81W drive axle
- 12.00x20 24pr bias drive/steer tires



XHO-350L

OFFSET CAB

Cap: 35K lbs (16K kg)
W.B.: 148 in (3759 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 4" x 8" x 96" pin mounted forks

- Cummins QSB 6.7L 173hp
- Dana TE-14 4-speed transmission
- Kessler D-81W drive axle
- 12.00x20 24pr bias drive/steer tires



XO-550S

OFFSET CAB

Cap: 55K lbs (25K kg)
W.B.: 156 in (3962 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 5" x 10" x 72" pin mounted forks

- Cummins QSB 6.7L 225hp
- Dana TE-17 3-speed transmission
- Axletech PRLC1794 HD drive axle
- 14.00x25 24pr bias drive/steer tires

36" - 50" LC: Rigger, RoRo, & Raised



X4030

RIGGER

Cap: 30K lbs (13.6K kg)
W.B.: 132 in (3352 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 10-ft. Direct Lift 3-stage mast
- 96-in pin-type "C" carriage
- 3.5" x 10" x 96" pin mounted forks
- Cummins QSB 6.7L 173hp
- Dana TE-14 3-speed transmission
- Axletech PRC-785W drive axle
- 12.00x20 24pr bias drive/steer tires



X620RR

RORO

Cap: 62K lbs (28K kg)
W.B.: 167 in (4241 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 10-ft. Direct Lift 2-stage mast
- 120-in pin-type "C" carriage
- 5" x 10" x 96" pin mounted forks
- Cummins QSL9 250hp
- Dana TC-36 4-speed transmission
- Kessler D-102 drive axle
- 16.00x25 36pr bias drive/steer tires



X720RR

RORO

Cap: 72K lbs (33K kg)
W.B.: 185 in (4699 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 10-ft. Direct Lift 2-stage mast
- 120-in pin-type "C" carriage
- 5" x 12" x 96" pin mounted forks
- Cummins QSL9 250hp
- Dana TC-36 4-speed transmission
- Kessler D-102 drive axle
- 16.00x25 36pr bias drive/steer tires



X500MR

RAISED CAB

Cap: 50K lbs (23K kg)
W.B.: 156 in (3962 mm)
L.C.: 50 in (1270 mm)

STANDARD FEATURES:

- 18-ft Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 5" x 10" x 96" pin mounted forks
- Cummins QSL9 250hp
- Dana TE-17 3-speed transmission
- Axletech PRC-1794 HD drive axle
- 14.00x25 24pr bias drive/steer tires

36" - 48" LC: Removable Counterweight



XH400RC

REMOVABLE COUNTERWEIGHT

Cap: 40K lbs (16.3K kg)
W.B.: 158 in (4013 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 4.5" x 8.5" x 96" pin mounted forks
- Cummins QSB 6.7L 200hp
- Dana TE-14 3-speed transmission
- Axletech PRC1756W drive axle
- 12.00x24 20pr bias drive/steer tires



X550RC

REMOVABLE COUNTERWEIGHT

Cap: 55K lbs (25K kg)
W.B.: 156 in (3962 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" carriage
- 5" x 10" x 96" pin mounted forks
- Cummins QSB 6.7L 225hp
- Dana TE-17 3-speed transmission
- Axletech PRLC1794 HD drive axle
- 14.00x25 24pr bias drive/steer tires



X925RC

REMOVABLE COUNTERWEIGHT

Cap: 92.5K lbs (42K kg)
W.B.: 225 in (5715 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" SS carriage
- 86" coil ram
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-30 5-speed transmission
- Kessler D-102W drive axle
- 18.00x25 40pr bias drive/steer tire



X1000RC

REMOVABLE COUNTERWEIGHT

Cap: 100K lbs (45.4K kg)
W.B.: 195 in (4953 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 15-ft. Ultra-Vu 2-stage mast
- 142-in pin-type "C" SS carriage
- 3.5" x 25" x 60" pin mounted forks
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-30 5-speed transmission
- Kessler D-102W drive axle
- 18.00x25 40pr bias drive/steer tire

80K - 100K: Log Stackers




XLS-800, 900

FIXED CENTER CAB

Cap: 80K lbs (36.3K kg)
Cap: 90K lbs (41K kg)
W.B.: 245 in (6223 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- Log Clamp w/Kickers
- Custom Tines
- Volvo 12.8 L-TAD1374VE-388 4F
- Dana 6422 4-speed APC trans.
- Kessler D-111W HD drive axle
- 33.25x35 50pr bias tires
- 18x25 40pr bias tires



XLS-1000

ROTATING OPERATOR SIDE CAB

Cap: 100K lbs (45.4K kg)
W.B.: 288 in (7315 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- Log Clamp w/Kickers
- Custom Tines
- Volvo 12.8 L-TAD1384VE-503 S5
- Dana 6422 4-speed APC trans.
- Kessler D-111W HD drive axle
- 37.25x39 44pr bias tires
- 21.25x25 32pr bias tires

SPECIAL BUILT: Tow & Pallet



XTX-200

TOW TRUCK

Cap: 20K lbs (9.1K kg)
W.B.: 91 in (2311 mm)
L.C.: NA

STANDARD FEATURES:

- Tow Hitch
- QSB4.5-C140 4F
- Dana TC-32 transmission
- Axletech PRC785W3H HD drive axle
- 10.00x20 solid drive/steer tires



XPT-550

PALLET TRUCK

Cap: 55K lbs (25K kg)
W.B.: 117 in (2972 mm)
L.C.: NA

STANDARD FEATURES:

- Platform with 4" rise
- QSB4.5-C140 4F
- Hydrostatic pump transmission
- Wheel motors
- (2x) 28x14x22 solid rubber tires
- (8x) platform urethane tires



PORT OPERATIONS:

CONTAINERS

EMPTY, LOADED & REACH STACKERS



XEC 15K- 20K: Empty Container Handlers



XEC-150LE

4-HIGH STACKING

Cap: 15K lbs (6.8K kg)
W.B.: 121 in (3073 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 32.5-ft. Ultra-Vu mast
- 2040 SP (ELME) attachment
- Cummins QSB 6.7L 4F 173hp
- Dana TE-14 3-speed APC trans.
- Kessler D-81W HD drive axle
- 12.00x20 24pr bias tires



XEC-155/6

5/6-HIGH STACKING

Cap: 15K lbs (6.8K kg)
W.B.: 150 in (3810 mm)
L.C.: 100 in (2540 mm)

STANDARD FEATURES:

- 45-ft. Ultra-Vu mast
- 2040 SP (ELME) attachment
- Cummins QSB 6.7L 4F 173hp
- Dana TE-14 3-speed APC trans.
- Kessler D-81W HD drive axle
- 12.00x20 24pr bias tires



XEC-205/6, XEC-206/7 XEC-207/8

5/8-HIGH STACKING

Cap: 20K lbs (9.1K kg)
W.B.: 180 in (4572 mm)
L.C.: 103 in (2616 mm)

STANDARD FEATURES:

- (205/6) 46-ft. Ultra-Vu mast
- (206/7) 54-ft. Ultra-Vu mast
- (207/8) 63-ft. Ultra-Vu mast
- 2040 SP (ELME) attachment
- Cummins QSB 6.7L 4F 225hp
- Dana TE-14 3-speed APC trans.
- Axeltch PRC1756W HD drive axle
- 14.00x24 24pr bias tires

XLC 88K- 90K: Loaded Container Handlers



XLC-974

4-HIGH STACKING

Cap: 90K lbs (41K kg)
W.B.: 236 in (5994 mm)
L.C.: 97 in (2464 mm)

STANDARD FEATURES:

- 32.5-ft. Ultra-Vu mast
- 2040 SP (ELME) attachment
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x25 40pr bias drive tires
- 18.00x25 40pr bias steer tires



XLC-975

5-HIGH STACKING

Cap: 90K lbs (41K kg)
W.B.: 236 in (5994 mm)
L.C.: 97 in (2464 mm)

STANDARD FEATURES:

- 42-ft. Ultra-Vu mast
- 2040 SP (ELME) attachment
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x25 40pr bias drive tires
- 18.00x25 40pr bias steer tires



XLC-976

6-HIGH STACKING

Cap: 90K lbs (41K kg)
W.B.: 236 in (5994 mm)
L.C.: 97 in (2464 mm)

STANDARD FEATURES:

- 51.5-ft. Ultra-Vu mast
- 2040 SP (ELME) attachment
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x25 40pr bias drive tires
- 18.00x25 40pr bias steer tires



XLCT-988

3-HIGH STACKING

Cap: 88K lbs (40K kg)
W.B.: 288 in (7315 mm)
L.C.: 110 in (2794 mm)

STANDARD FEATURES:

- 24-ft. Ultra-Vu mast
- 2040 ISO/WTP/LEGS attachment
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x25 40pr bias drive tires
- 18.00x25 40pr bias steer tires

XRS 88K- 120K: Reach Stackers



XRS-1072

5-HIGH STACKING

Cap: 101.4K lbs (46K kg)
1st Row 4-High
W.B.: 256 in (6502 mm)
L.C.: 70 in (1778 mm)

STANDARD FEATURES:

- 5-High Boom (Optional 6-High)
- 2040 PPS (CVS) attachment
- Cummins X12 (335 Hp) S5
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x25 40pr bias tires
- (Optional 18.00x30)



XRS-1080

5-HIGH STACKING - WTP

Cap: 101.4K lbs (46K kg)
1st Row 4-High
W.B.: 256 in (6502 mm)
L.C.: 70 in (1778 mm)

STANDARD FEATURES:

- 5-High Boom (Optional 6-High)
- 2040 PPS/WTP (CVS) attachment
- Cummins X12 (335 Hp) S5
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x33 40pr bias tires



XRS-8877

5-HIGH w/JACKS/LEGS

Cap: 88K lbs (40K kg)
1st Row 4-High
W.B.: 315 in (8001 mm)
L.C.: 70 in (1778 mm)

STANDARD FEATURES:

- 5-High Boom
- 2040 PPS/WTP/LEGS (CVS)
- Cummins X12 (335 Hp) S5
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x33 40pr bias tires



XRS-9985

5-HIGH w/JACKS - BABA

Cap: 99K lbs (45K kg)
1st Row 4-High
W.B.: 280 in (7112 mm)
L.C.: 76 in (1930 mm)

STANDARD FEATURES:

- 5-High Boom
- 2040/ISO WPT attachment
- Volvo 12.8 L-TAD1381VE-388 S5
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x33 40pr bias tires



XRS-1075

5-HIGH STACKING - PPS

Cap: 101.4K lbs (46K kg)
1st Row 4-High
W.B.: 256 in (6502 mm)
L.C.: 70 in (1778 mm)

STANDARD FEATURES:

- 5-High Boom (6-High Option)
- 2040 PPS (CVS) attachment
- Cummins X12 (335 Hp) S5
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x33 40pr bias tires



XRS-1090

5-HIGH w/JACKS & WTP

Cap: 101.4K lbs (46K kg)
1st Row 4-High
W.B.: 295 in (7493 mm)
L.C.: 70 in (1778 mm)

STANDARD FEATURES:

- 5-High Boom (Optional 6-High)
- 2040 PPS/WTP (CVS) attachment
- Cummins X12 (335 Hp) S5
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x33 40pr bias tires



XRS-9972

5-HIGH STACKING - BABA

Cap: 99K lbs (45K kg)
1st Row 4-High
W.B.: 258 in (6553 mm)
L.C.: 81 in (2057 mm)

STANDARD FEATURES:

- 5-High Boom (Opt. 1, 3, or 5 Hooks)
- 2040 PPS (Taylor) attachment
- Volvo 12.8L-TAD1381VE-388 S5
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x25 40pr bias tires



XHRS-1000

4-HIGH BARGE w/NEG. LIFT

Cap: 92.4K lbs (42K kg)
W.B.: 360 in (9144 mm)
L.C.: 160 in (4064 mm)

STANDARD FEATURES:


- 3-High Boom (4-High Negative)
- 2040 ISO attachment
- Volvo 12.8 L-TAD1382VE-428 S5
- Dana TE-30 5-speed APC trans.
- Kessler D-111W HD drive axle
- 18.00x33 40pr bias tires



CUSHION TIRE SERIES:

CUSHION TIRE

XC, XHC, XHCS, XE

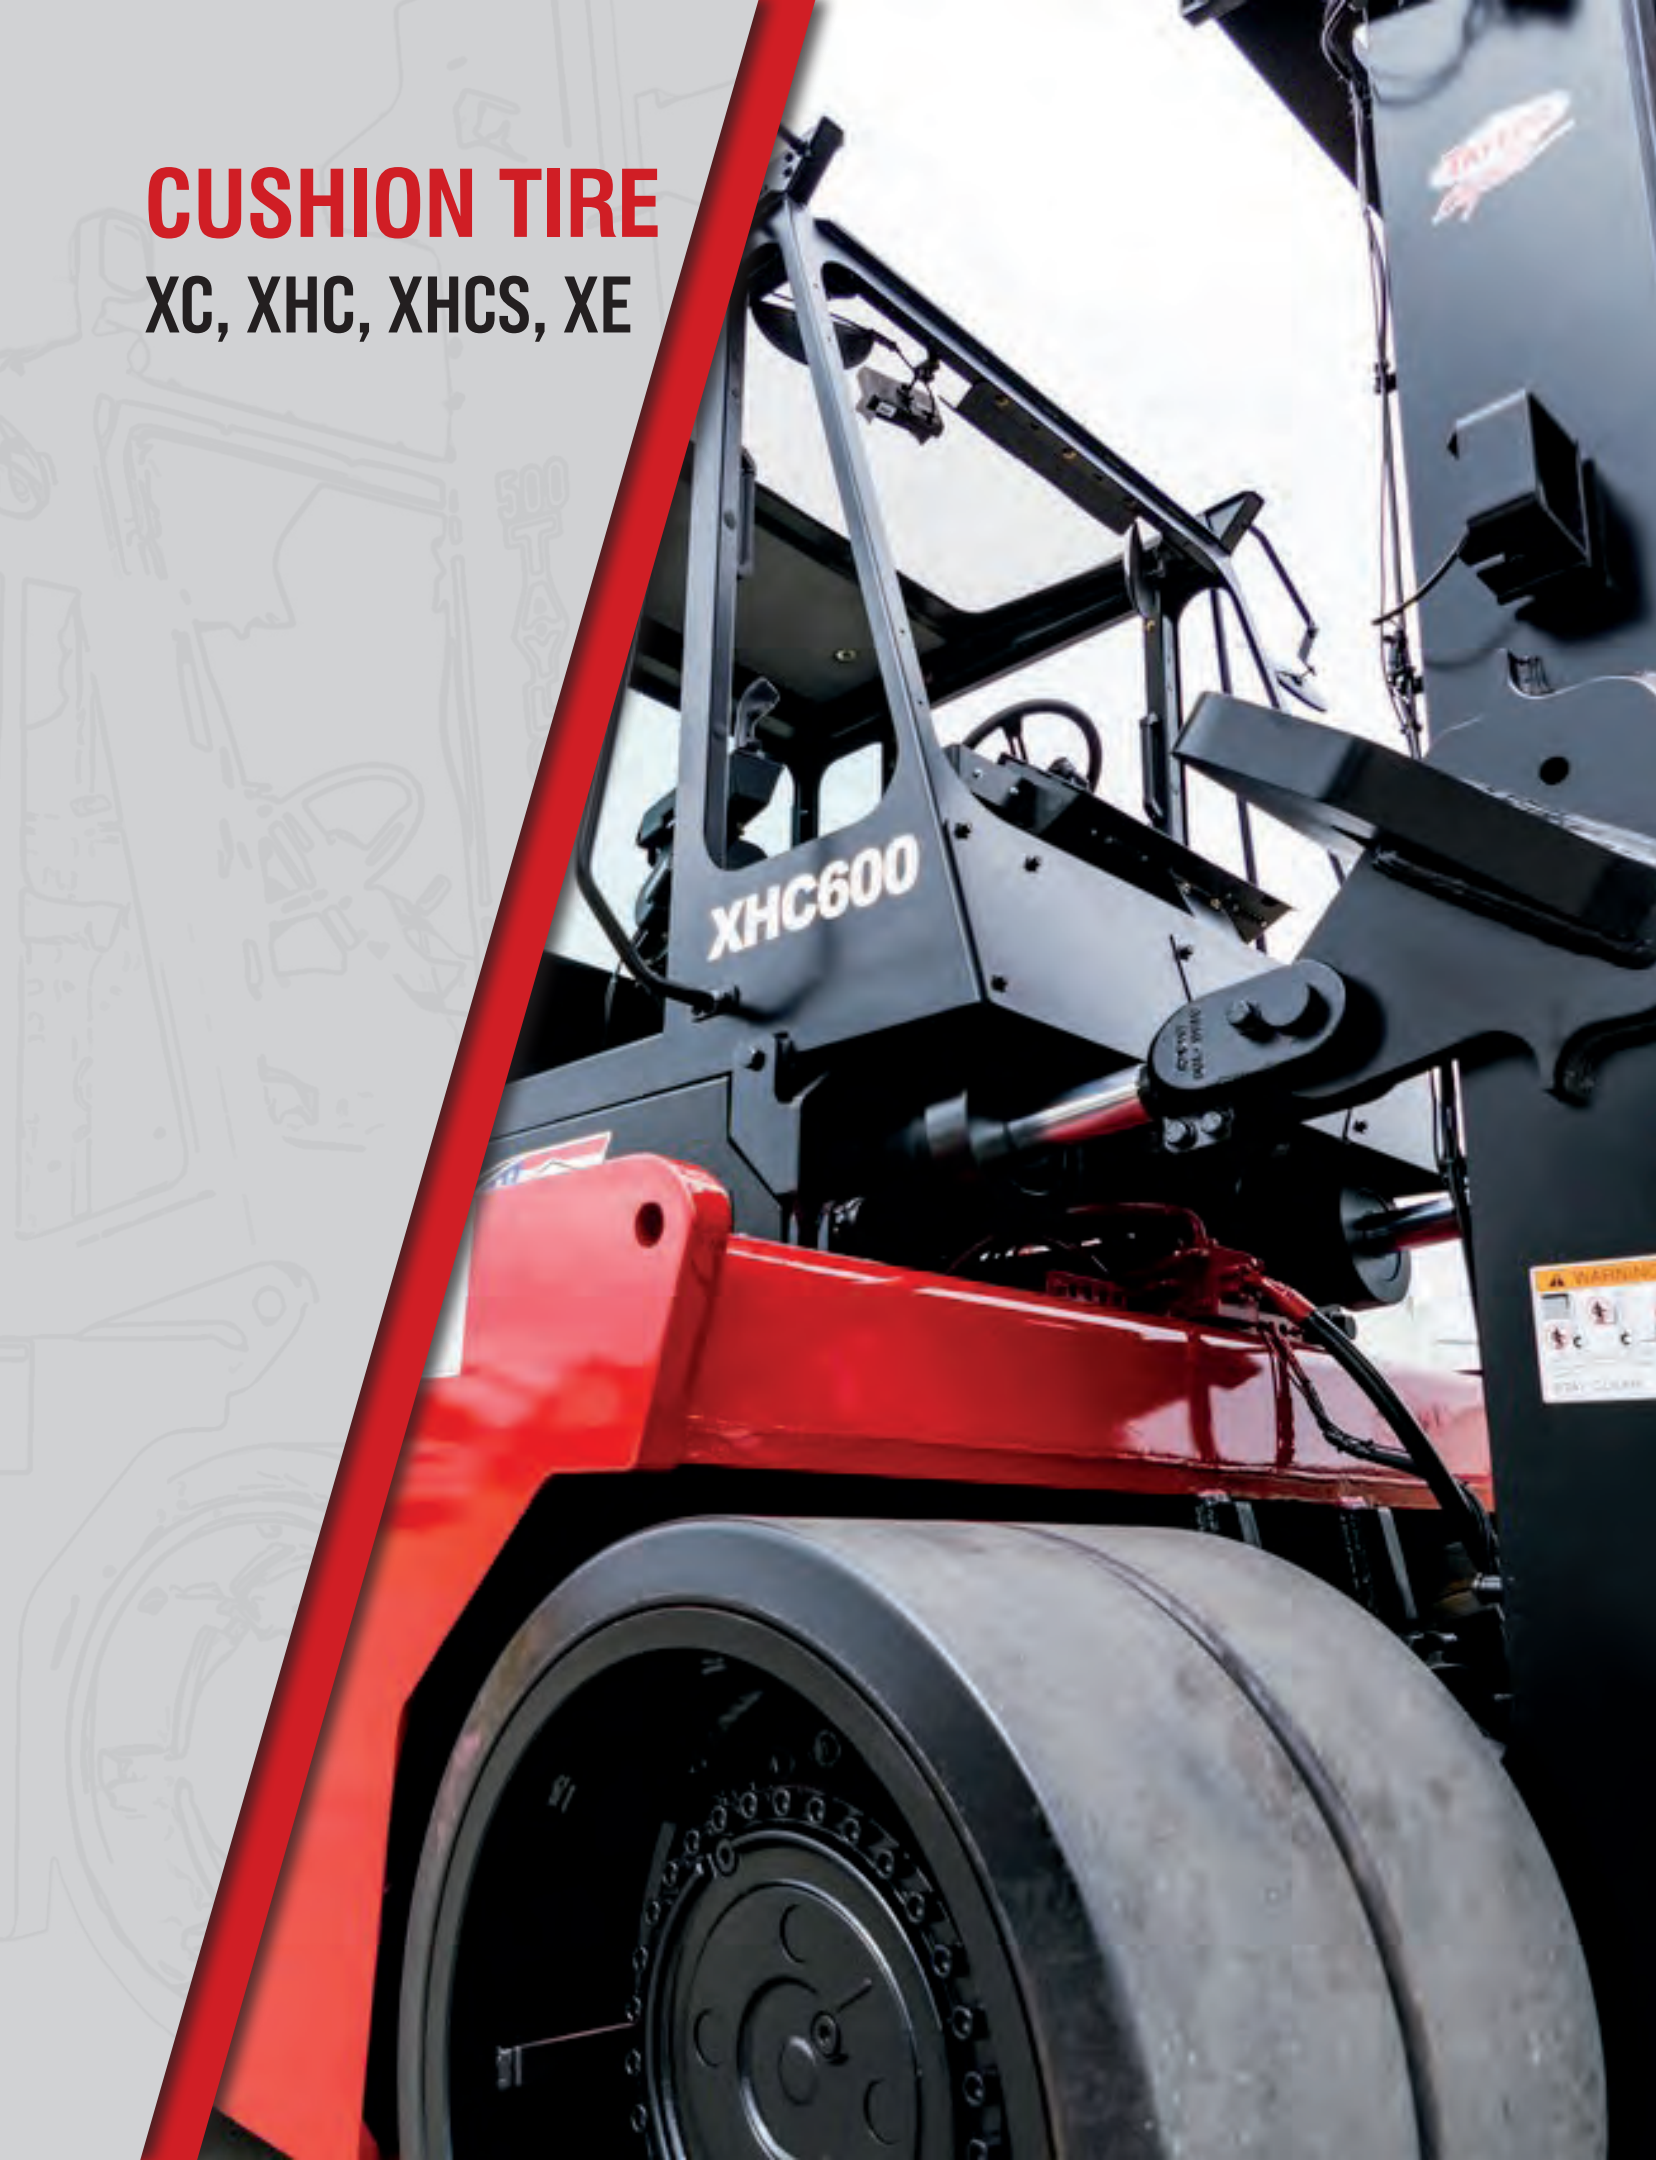

XC 24" LC: 18K - 35K Capacity



XC180S, 200S, 220S

CUSHION TIRE FORKLIFT

Cap: 18K lbs (8.2K kg)
Cap: 20K lbs (9.1K kg)
Cap: 22K lbs (10K kg)
W.B.: 80 in (2032 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 8'2" mast
- 53-in pin-type carriage
- 2.5" x 7" x 48" pin mounted forks
- GM 5.7L LPG 125hp
- Dana TC-20 3-speed transmission
- Axletech PRLC874W drive axle
- 28x12x22 poly drive tires
- 22x8x16 poly steer tires



XC180, 200, 220SL

SHORT & LOW CUSHION TIRE

Cap: 18K lbs (8.2K kg)
Cap: 20K lbs (9.1K kg)
Cap: 22K lbs (10K kg)
W.B.: 80 in (2032 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 7-ft mast
- 53-in pin-type carriage
- 2.5" x 7" x 48" pin mounted forks
- GM 5.7L LPG 125hp
- Dana TC-20 3-speed transmission
- Axletech PRLC874W drive axle
- 28x12x22 poly drive tires
- 22x8x16 poly steer tires



XC350L

CUSHION TIRE FORKLIFT

Cap: 35K lbs (16K kg)
W.B.: 98 in (2489 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 7'4" mast
- 53-in pin-type carriage
- 3" x 7" x 48" pin mounted forks
- GM 5.7L LPG 125hp
- Dana TC-20 3-speed transmission
- Axletech PRLC874W drive axle
- 28x16x22 poly drive tires
- 22x9x16 poly steer tires



XC250M, 300M

CUSHION TIRE FORKLIFT

Cap: 25K lbs (11.3K kg)
Cap: 30K lbs (13.6K kg)
W.B.: 88 in (2235 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 7'4" mast
- 53-in pin-type carriage
- 3" x 7" x 48" pin mounted forks
- GM 5.7L LPG 125hp
- Dana TC-20 3-speed transmission
- Axletech PRLC874W drive axle
- 28x14x22 poly drive tires
- 22x8x16 poly steer tires



XC250ML, 300ML

LOW CUSHION TIRE

Cap: 25K lbs (11.3K kg)
Cap: 30K lbs (13.6K kg)
W.B.: 88 in (2235 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 5'4" mast
- 53-in pin-type carriage
- 2.5" x 7" x 48" pin mounted forks
- GM 5.7L LPG 125hp
- Dana TC-20 3-speed transmission
- Axletech PRLC874W drive axle
- 28x12x22 poly drive tires
- 22x8x16 poly steer tires

XHC 24"- 36" LC: Cushion Tire & Extendable



XHC250S, 300S

CUSHION TIRE FORKLIFT

Cap: 25K lbs (11.3K kg)
Cap: 30K lbs (13.6K kg)
W.B.: 96 in (2438 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 8-ft. direct lift mast
- 58-in pin-type "C" carriage
- 3" x 8" x 48" pin mounted forks
- Cummins QSB 4.5L 140hp
- Dana TE-14 3-speed transmission
- Axletech PRLC874M drive axle
- 28x16x22 poly drive tires
- 22x9x16 poly steer tires



XHC500L

CUSHION TIRE FORKLIFT

Cap: 50K lbs (23K kg)
W.B.: 110 in (2794 mm)
L.C.: 30 in (762 mm)

STANDARD FEATURES:

- 70-in rigid mast
- 12" x 48" coil ram carriage
- 3.5" x 8.7" x 60" pin mounted forks
- Cummins B6.7-C-173 Stage 5
- Dana TE-14 3-speed transmission
- Axletech PRLC1752P drive axle
- 36x20x30 poly drive tires
- 28x12x22 poly steer tires



XHCS600 Stand-Up

CUSHION TIRE FORKLIFT

Cap: 60K lbs (27K kg)
W.B.: 125 in (3175 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 8-ft. direct lift mast
- 72-in pin-type "C" carriage type-A
- 5" x 10" x 72" pin mounted forks
- Cummins QSB6.7-C-173 T4F
- Dana TC-32 3-speed transmission
- Kessler D-91 drive axle
- 36x20x30 poly drive tires
- 28x14x22 poly steer tires



XHCS850 Stand-Up

CUSHION TIRE FORKLIFT

Cap: 85K lbs (36.3K kg)
W.B.: 130 in (3302 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 6-ft. direct lift mast
- Ram carriage
- 49" integrated coil ram
- Cummins QSB6.7-C-225 T4F
- Dana TC-36 3-speed transmission
- Kessler D-102 drive axle
- 43x28x34 poly drive tires
- 36x14x30 poly steer tires



XHC400L

CUSHION TIRE FORKLIFT

Cap: 40K lbs (18K kg)
W.B.: 110 in (2794 mm)
L.C.: 30 in (762 mm)

STANDARD FEATURES:

- 8-ft. direct lift mast
- 65-in pin-type "C" carriage
- 3.5" x 8.7" x 60" pin mounted forks
- Cummins B6.7-C-173 Stage 5
- Dana TE-14 3-speed transmission
- Axletech PRLC1752P drive axle
- 36x20x30 poly drive tires
- 28x12x22 poly steer tires



XHC600

CUSHION TIRE FORKLIFT

Cap: 60K lbs (27K kg)
W.B.: 125 in (3175 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 9-ft. direct lift mast
- 88-in pin-type "C" carriage
- 5" x 10" x 72" pin mounted forks
- Cummins QSB6.7-C-173 T4F
- Dana TE-14 3-speed transmission
- Kessler D-91 drive axle
- 36x20x30 poly drive tires
- 28x14x22 poly steer tires



XHCS800 Stand-Up

CUSHION TIRE FORKLIFT

Cap: 80K lbs (36.3K kg)
W.B.: 130 in (3302 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 7.5-ft. direct lift mast
- 80-in pin-type "C" carriage type-A
- 5" x 12" x 72" pin mounted forks
- Cummins QSB6.7-C-225 T4F
- Dana TC-36 3-speed transmission
- Kessler D-102 drive axle
- 43x28x34 poly drive tires
- 36x14x30 poly steer tires



XE4060 Extendable

CUSHION TIRE RIGGER

Cap: 40K/60K lbs (18K/27.2K kg)
W.B.: 98/146 in (2489/3708 mm)
L.C.: 36 in (914 mm)

STANDARD FEATURES:

- 8.3-ft. (100") direct lift mast
- 70" carriage
- 4.5" x 10" x 96" pin mounted forks
- PSI 4.3L LPG 105hp
- Rexroth hydrostatic transmission
- Rexroth drive axle
- 28x20x22 poly drive tires
- 28x20x22 poly steer tires



GLOBAL TRUCK SERIES:

GT SERIES

PNEUMATIC TIRE & CUSHION TIRE



GT 24" LC: 4K - 18K Capacity



GT40, 50

PNEUMATIC GT LIFT TRUCK

Cap: 4K lbs (1.8K kg)

Cap: 5K lbs (2.3K kg)

W.B.: 64 in (1623 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 130-in Max Fork Height 2-Stage
- 189-in Max Fork Height 3-Stage
- 41-in Class II (ISO) Carriage
- 1.75" x 4" x 42" pin mounted forks
- 2.4K HMC Theta LPG engine
- Powershift trans. with inching
- 7:00 x 12-14pr single drive tires
- 6.00 x 9-10pr steer tires



GT135

PNEUMATIC GT LIFT TRUCK

Cap: 13.5K lbs (6K kg)

W.B.: 88.6 in (2250 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- Multiple Standard/Triple Stage Mast
- 80-in Class III (ISO) Carriage
- 2.5" x 6" x 48" pin mounted forks
- Deutz TD3.6L 74hp diesel engine
- PSI 4X 4.3L LPG engine
- 3-sp powershift trans. with inching
- 8.25X15-14pr single drive tires
- 8.25X15-14pr steer tires



GT165

PNEUMATIC GT LIFT TRUCK

Cap: 16.5K lbs (7.5K kg)

W.B.: 88.6 in (2250 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- Multiple Standard/Triple Stage Mast
- 80-in Class III (ISO) Carriage
- 2.5" x 7" x 48" pin mounted forks
- Deutz TD3.6L 74hp diesel engine
- PSI 4X 4.3L LPG engine
- 3-sp powershift trans. with inching
- 8.25X15-14pr single drive tires
- 8.25X15-14pr steer tires



GT60, 66

PNEUMATIC GT LIFT TRUCK

Cap: 6K lbs (2.7K kg)

Cap: 6.6K lbs (3K kg)

W.B.: 67 in (1702 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 130-in Max Fork Height 2-Stage
- 189-in Max Fork Height 3-Stage
- 41-in Class II (ISO) Carriage
- 1.75" x 4" x 42" pin mounted forks
- 2.4K HMC Theta LPG engine
- Powershift trans. with inching
- 28x9x15-14pr single drive tires
- 6.50X10-12pr steer tires



GT155

PNEUMATIC GT LIFT TRUCK

Cap: 15.5K lbs (7K kg)

W.B.: 88.6 in (2250 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- Multiple Standard/Triple Stage Mast
- 80-in Class III (ISO) Carriage
- 2.5" x 6" x 48" pin mounted forks
- Deutz TD3.6L 74hp diesel engine
- PSI 4X 4.3L LPG engine
- 3-sp powershift trans. with inching
- 8.25X15-14pr single drive tires
- 8.25X15-14pr steer tires



GT180

PNEUMATIC GT LIFT TRUCK

Cap: 18K lbs (8.2K kg)

W.B.: 98.4 in (2499 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- Multiple Standard/Triple Stage Mast
- 80-in Class III (ISO) Carriage
- 2.5" x 7" x 48" pin mounted forks
- Deutz TD3.6L 74hp diesel engine
- 3-sp powershift trans. with inching
- 8.25X15-18pr single drive tires
- 8.25X15-18pr steer tires

GTC 24" LC: 4K - 6.5K Capacity



GTC40, 50

CUSHION TIRE GT LIFT TRUCK

Cap: 4K lbs (1.8K kg)

Cap: 5K lbs (2.3K kg)

W.B.: 56.3 in (1430 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 130" Std. 189" 3-stage mast
- 37-in Class II (ISO) Carriage
- 1.75" x 4" x 42" forks
- Ford 2.5L LPG engine
- Single speed auto-shift trans.
- 21.00X7 drive tires
- 16.00X5-10.5 steer tires



GTC60, 65

CUSHION TIRE GT LIFT TRUCK

Cap: 6K lbs (2.7K kg)

Cap: 6.5K lbs (3K kg)

W.B.: 56.3 in (1430 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- (60) 130" Std. 189" 3-stage mast
- (65) 125" Std. 182" 3-stage mast
- 41-in Class III (ISO) Carriage
- (60) 1.75" x 4" x 42" forks
- (65) 2" x 5" x 42" forks
- Ford 2.5L LPG engine
- Single speed auto-shift trans.
- (60) 21X7 dr. tires/16X5-10.5 st.
- (65) 21X9 dr. tires/16X5-10.5 st.

GTR 24" LC: 4K - 12K Capacity



GTR40, 50

PNEUMATIC GTR LIFT TRUCK

Cap: 4K lbs (1.8K kg)

Cap: 5K lbs (2.3K kg)

W.B.: 64 in (1623 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 130-in Max Fork Height 2-Stage
- 189-in Max Fork Height 3-Stage
- 41-in Hook Type Class II Carriage

- 1.75" x 4" x 42" pin mounted forks
- Ford 2.5L LPG engine
- Powershift trans. with inching
- 7:00 x 12-14pr single drive tires
- 6.00 x 9-10pr steer tires



GTR80, 90

PNEUMATIC GTR LIFT TRUCK

Cap: 8K lbs (3.6K kg)

Cap: 9K lbs (4.1K kg)

W.B.: 76.8 in (1950 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- Multiple Standard/Triple Stage Mast
- 53-in Hook Type Class III Carriage
- 2" x 5" x 48" pin mounted forks

- HDI D34 T4 Final diesel engine
- Kubota WG3800 LPG engine
- 2-sp powershift trans. with inching
- 8.25X15-14pr single drive tires
- 7.00X12-14pr steer tires



GTR60, 70

PNEUMATIC GTR LIFT TRUCK

Cap: 6K lbs (2.7K kg)

Cap: 7K lbs (3.2K kg)

W.B.: 67 in (1702 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 125-in Max Fork Height 2-Stage
- 182-in Max Fork Height 3-Stage
- 45-in Hook Type Class II Carriage

- 2" x 5" x 42" pin mounted forks
- Ford 2.5L LPG engine
- Powershift trans. with inching
- 28x9x15-14pr single drive tires
- 6.50X10-12pr steer tires



GTR100, 110, 120

Cap: 10K lbs (4.5K kg)

Cap: 11K lbs (5K kg)

Cap: 12K lbs (5.5K kg)

W.B.: 82.7 in (2100 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- Multiple Standard/Triple Stage Mast
- 53-in Hook Type Class III Carriage
- 2" x 6" x 48" pin mounted forks

- HDI D34 T4 Final diesel engine
- Kubota WG3800 LPG engine
- 2-sp powershift trans. with inching
- 7.50 X15-12pr single drive tires
- 7.00X12-14pr steer tires

GTR 24"-48" LC: 36K - 65K Capacity



GTR16-6

PNEUMATIC GTR LIFT TRUCK

Cap: 36K lbs (16.3K kg)

W.B.: 122 in (3099 mm)

L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 118" (3M) Duplex Mast
- 2-piece SS, simultaneous FP
- 3.35" x 7.9" x 60" forks

- Cummins B6.7 Stage V
- ZF 3WG161 Transmission
- Kessler D-81 W
- 12.00x20 single drive/steer tires



GTR16-12

PNEUMATIC GTR LIFT TRUCK

Cap: 36K lbs (16.3K kg)

W.B.: 148 in (3759 mm)

L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 118" (3M) Duplex Mast
- 2-piece SS, simultaneous FP
- 4.3" x 9.8" x 96.1" forks

- Cummins B6.7 Stage V
- ZF 3WG171 Transmission
- Kessler D-81 W
- 12.00x24 single drive/steer tires



GTR25-12

PNEUMATIC GTR LIFT TRUCK

Cap: 55K lbs (25K kg)

W.B.: 167 in (4242 mm)

L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 157" (4.0M) Duplex Mast
- 2-piece SS, simultaneous FP
- 4.3" x 9.8" x 94.5" forks

- TAD881VE Stage V
- ZF 3WG211 Transmission
- Kessler D-91 W
- 14.00x24 single drive/steer tires



GTR30-12

PNEUMATIC GTR LIFT TRUCK

Cap: 65K lbs (K kg)

W.B.: 187 in (mm)

L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 157" (4.0M) Duplex Mast
- 2-piece SS, simultaneous FP
- 4.3" x 11.8" x 96.1" forks

- TAD881VE Stage V
- ZF 3WG211 Transmission
- Kessler D-91 W
- 16.00x25 single drive/steer tires



GTX SERIES.

GTX SERIES

PNEUMATIC TIRE



GTK FORKLIFTS: 55K - 73K Capacity



GTK550H PNEUMATIC GTK LIFT TRUCK

Cap: 55.1K lbs (25K kg)
W.B.: 167 in (4242 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13' Duplex Mast
- Hook-On SS & FP Carriage
- 4" x 10" x 95" forks
- B6.7 (225 Hp) - Stage V
- ZF 3-Speed Auto-shift (3F/3R)
- Kessler D-91 W
- 14.00x24 single drive/steer tires



GTK700H PNEUMATIC GTK LIFT TRUCK

Cap: 70.6K lbs (32K kg)
W.B.: 187 in (4750 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13' Duplex Mast
- Hook-On SS & FP Carriage
- 4.3" x 11.8" x 95" forks
- B6.7 (225 Hp) - Stage V
- ZF 3-Speed Auto-shift (3F/3R)
- Kessler D-91 W
- 16.00x25 single drive/steer tires



GTK620H PNEUMATIC GTK LIFT TRUCK

Cap: 61.7K lbs (28K kg)
W.B.: 177 in (4496 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13' Duplex Mast
- Hook-On SS & FP Carriage
- 4.3" x 11.8" x 95" forks
- B6.7 (225 Hp) - Stage V
- ZF 3-Speed Auto-shift (3F/3R)
- Kessler D-91 W
- 16.00x25 single drive/steer tires



GTK725H PNEUMATIC GTK LIFT TRUCK

Cap: 72.3K lbs (33K kg)
W.B.: 187 in (4750 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13' Duplex Mast
- Hook-On SS & FP Carriage
- 4.3" x 11.8" x 95" forks
- B6.7 (225 Hp) - Stage V
- ZF 3-Speed Auto-shift (3F/3R)
- Kessler D-91 W
- 16.00x25 single drive/steer tires

GTX FORKLIFTS: 83K - 105K Capacity



GTx835H PNEUMATIC GTX LIFT TRUCK

Cap: 83.8K lbs (38K kg)
W.B.: 196 in (5000 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13' Duplex
- Hook-On SS & FP Carriage
- 5.3" x 10" x 95" forks
- X12 (335 Hp) - Stage V
- TE-30 5-sp. APC
- Kessler D102 W
- 18.00x25 single drive/steer tires



GTx925H PNEUMATIC GTX LIFT TRUCK

Cap: 92.6K lbs (42K kg)
W.B.: 212 in (5385 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13' Duplex
- Hook-On SS & FP Carriage
- 4" x 10" x 95" forks
- X12 (335 Hp) - Stage V
- TE-30 5-sp. APC
- Kessler D102 W
- 18.00x25 single drive/steer tires



GTx1050H PNEUMATIC GTX LIFT TRUCK

Cap: 105.8K lbs (48K kg)
W.B.: 232 in (5893 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13' Duplex
- Hook-On SS & FP Carriage
- 4" x 10" x 95" forks
- X12 (335 Hp) - Stage V
- TE-30 5-sp. APC
- Kessler D102 W
- 18.00x25 single drive/steer tires



GTx880H PNEUMATIC GTX LIFT TRUCK

Cap: 88.2K lbs (40K kg)
W.B.: 197 in (5004 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 17" Direct Lift
- Integral Coil Ram Carriage
- 84" Coil Ram
- X12 (335 Hp) - Stage V
- TE-30 5-sp. APC
- Kessler D102 W
- 18.00x25 single drive/steer tires



GTx990H PNEUMATIC GTX LIFT TRUCK

Cap: 99.2K lbs (45K kg)
W.B.: 232 in (5893 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 13' Duplex
- Hook-On SS & FP Carriage
- 4" x 10" x 95" forks
- X12 (335 Hp) - Stage V
- TE-30 5-sp. APC
- Kessler D102 W
- 18.00x25 single drive/steer tires

GLOBAL EMPTY HANDLERS: 5-9 High Stacking



GTX-175/6HY GTX-177/8HY 5-8 HIGH STACKING

Cap: 17.6K lbs (8K kg)
W.B.: 180 in (4572 mm)

STANDARD FEATURES:

- 5/6 high stacking mast
- ELME 588TB spdr. PPS attachment
- 3.8L - 134 Hp & 65kW trac. motor
- 65kW Gen. w/Super-capacitors.
- Dual E-Hub
- 14.00x24 40pr bias tires



GTEC 9.7 GTEC 9.8 6-8 HIGH STACKING

Cap: 20K lbs (9.1K kg)
W.B.: 179 in (4547 mm)

STANDARD FEATURES:

- (9.7) 6/7 high stacking mast
- (9.8) 7/8 high stacking mast
- ELME PPS attachment
- Volvo TAD881VE Stage 5
- Dana 32000 transmission
- Kessler D-81W HD drive axle
- 14.00x24 40pr bias tires



GTX-205/6 GTX-206/7 GTX-207/8

Cap: 19.8K lbs (9K kg)
W.B.: 187 in (4750 mm)

STANDARD FEATURES:

- 5/6 high stacking mast
- ELME 588TB spdr. PPS attachment
- Cummins QSB 6.7L 225hp S5
- Dana TE-17 3-speed APC trans.
- Kessler D-81W HD drive axle
- 14.00x24 40pr bias tires



GTEC 10.7 GTEC 10.8 7-9 HIGH STACKING

Cap: 22K lbs (10K kg)
W.B.: 187 in (4750 mm)

STANDARD FEATURES:

- (10.7) 7/8 high stacking mast
- (10.8) 8/9 high stacking mast
- ELME PPS attachment
- Volvo TAD881VE Stage 5
- Dana TE-14 transmission
- Kessler D-81W HD drive axle
- 14.00x24 40pr bias tires

GLOBAL LOADED HANDLERS: 3-6 High Stacking



GTX883TB 3 HIGH STACKING

Cap: 90K lbs (41K kg)
W.B.: 295 in (7493 mm)

STANDARD FEATURES:

- 3 high stacking mast
- ELME spreader PPS/WTP/LEGS
- Cummins X12 (335 Hp) - Stage V
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x33 40pr bias tires



GTX884LC 4 HIGH STACKING

Cap: 88K lbs (40K kg)
W.B.: 256 in (6502 mm)

STANDARD FEATURES:

- 4 high stacking mast
- 2040 spreader PPS
- Cummins X12 (335 Hp) - Stage V
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x33 40pr bias tires



GTX885LC 5 HIGH STACKING

Cap: 88K lbs (40K kg)
W.B.: 256 in (6502 mm)

STANDARD FEATURES:

- 5 high stacking mast
- 2040 spreader PPS
- Cummins X12 (335 Hp) - Stage V
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x33 40pr bias tires



GTX886LC 6 HIGH STACKING

Cap: 88K lbs (40K kg)
W.B.: 256 in (6502 mm)

STANDARD FEATURES:

- 6 high stacking mast
- 2040 spreader PPS
- Cummins X12 (335 Hp) - Stage V
- Dana TE-30 5-speed APC trans.
- Kessler D-102W HD drive axle
- 18.00x33 40pr bias tires

GLOBAL REACH STACKERS: 26 - 99,000-lbs



GTX-2622 5/6-HIGH EMPTY STACKING

Cap: 26K lbs (12K kg)
W.B.: 201 in (5105 mm)

STANDARD FEATURES:

- 5/6-High Boom
- Empty Cont. 4-Point Top Pick Attach. 2040 spreader
- Cummins B6.7 (225 Hp) Stage 5
- Dana TE-17 3-speed APC trans.
- Kessler D-81W HD drive axle
- 14.00 x 24 40pr bias tires



GTX-9968 5-HIGH STACKING

Cap: 99K lbs (45K kg)
W.B.: 256 in (6502 mm)

STANDARD FEATURES:

- 5-High Boom
- ELME 2040 spreader PPS
- Cummins X12 (335 Hp) Stage 5
- Dana TE-30 5-sp. APC trans.
- Kessler D-102W HD drive axle
- 18.00x25 40pr bias tires



GRS-4531 5-HIGH STACKING

Cap: 99K lbs (45K kg)
W.B.: 236 in (5994 mm)

STANDARD FEATURES:

- 5-High Boom
- ELME 2040 spreader MPS
- Volvo D11 Stage V
- Dana 36000 transmission
- Kessler D-102W HD drive axle
- 18.00x25 40pr bias tires



ZERO EMISSIONS SERIES:

ELECTRIC MODELS



ZH 36"- 48" LC: 36K - 100K Capacity



ZH360L - BABA

BEV - PNEUMATIC TIRE - BABA

Cap: 36K lbs (16.3K kg)
W.B.: 148 in (3759 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" SS/FP carriage
- 4" x 8" x 96" pin mounted forks
- 650V PMSM Traction Motor
- Battery - 246 kWh (NMC)
- Dana E-Axle HD drive axle
- Regenerative Wet-Disc Brakes
- 12.00x20 24pr bias drive/steer tires



ZH650L - BABA

BEV - PNEUMATIC TIRE - BABA

Cap: 65K lbs (30K kg)
W.B.: 180 in (4572 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" SS/FP carriage
- 5" x 12" x 96" pin mounted forks
- 660V PMSM Traction Motor
- Battery - 369 kWh (NMC)
- Dana E-Axle HD drive axle
- Regenerative Wet-Disc Brakes
- 16.00x25 28pr bias drive/steer tires



ZH1000 - BABA

BEV - PNEUMATIC TIRE - BABA

Cap: 100K lbs (45K kg)
W.B.: 225 in (5715 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 15-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" SS/FP carriage
- 6" x 12" x 96" pin mounted forks
- 660V PMSM Traction Motor
- Battery - 985 kWh (NMC)
- Dana E-Axle HD drive axle
- Regenerative Wet-Disc Brakes
- 18.00x33 40pr bias drive/steer tires



ZH550M - BABA

BEV - PNEUMATIC TIRE - BABA

Cap: 55K lbs (25K kg)
W.B.: 170 in (4318 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 11-ft. Ultra-Vu 2-stage mast
- 100-in pin-type "C" SS/FP carriage
- 4" x 8" x 96" pin mounted forks
- 660V PMSM Traction Motor
- Battery - 246 or 369 kWh (NMC)
- Dana E-Axle HD drive axle
- Regenerative Wet-Disc Brakes
- 14.00x25 20pr bias drive/steer tires



ZH925L - BABA

BEV - PNEUMATIC TIRE - BABA

Cap: 92.5K lbs (42K kg)
W.B.: 225 in (5715 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 15-ft. Ultra-Vu 2-stage mast
- 120-in pin-type "C" SS/FP carriage
- 6" x 12" x 96" pin mounted forks
- 660V PMSM Traction Motor
- Battery - 985 kWh (NMC)
- Dana E-Axle HD drive axle
- Regenerative Wet-Disc Brakes
- 18.00x33 40pr bias drive/steer tires



ZEC Series: Empty Container Handlers



ZEC-205/6, 6/7, 7/8 5,6,7,8-HIGH STACKING

Cap: 20K lbs (9.1K kg)
W.B.: 180 in (4572 mm)
L.C.: 103 in (2616 mm)

STANDARD FEATURES:

- (205/6) 46-ft. Ultra-Vu mast
- (206/7) 54-ft. Ultra-Vu mast
- (207/8) 63-ft. Ultra-Vu mast
- 2040 SP (ELME) attachment
- 650V PMSM Traction Motor
- Battery - 246 or 492 kWh (NMC)
- Dana E-Axle HD drive axle
- Regenerative Wet-Disc Brakes
- 14.00x24 24pr bias drive/steer tires



ZLC Series: Loaded Container Handlers



ZLC-994, 995, 996 4,5,6-HIGH STACKING

Cap: 20K lbs (9.1K kg)
W.B.: 180 in (4572 mm)
L.C.: 103 in (2616 mm)

STANDARD FEATURES:

- (994) 32.5-ft. Ultra-Vu mast
- (995) 42-ft. Ultra-Vu mast
- (996) 51.5-ft. Ultra-Vu mast
- S2040 M attachment
- 660V PMSM Traction Motor
- Battery - 985 kWh (NMC)
- Dana E-Axle HD drive axle
- Regenerative Wet-Disc Brakes
- 18.00x25 40pr bias drive/steer tires



ZRS Series: Reach Stackers



ZRS-9972 5-HIGH STACKING - BABA

Cap: 101K lbs (46K kg)
W.B.: 248 in (6300 mm)
L.C.: 81 in (2057 mm)

STANDARD FEATURES:

- 5-High Boom
- 2040 PPS (Taylor) attachment
- 660V PMSM Traction Motor
- Battery - 985 kWh (NMC)
- Kessler E-Axle HD drive axle
- Regenerative Wet-Disc Brakes
- 18.00x25 40pr bias drive/steer tires



ZRS-9972 HOOK 1,3,5 HOOK - BABA

1 Cap: 120K lbs (54.4K kg)
3 Cap: 106.7K lbs (48.4K kg)
5 Cap: 106.7K lbs (48.4K kg)
W.B.: 248 in (6300 mm)
L.C.: 81 in (2057 mm)

STANDARD FEATURES:

- 5-High Boom
- 1,3,5 Hook (Taylor) attachment
- 660V PMSM Traction Motor
- Battery - 985 kWh (NMC)
- Kessler E-Axle HD drive axle
- Regenerative Wet-Disc Brakes
- 18.00x25 40pr bias drive/steer tires

GTE 24" LC: 5K - 18K Capacity



GTE50

BEV - ELECTRIC LIFT TRUCK

Cap: 5K lbs (2.3K kg)
W.B.: 63.4n (1610 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 130-in Std. / 189-in Tri. mast
- 41-in Class III (ISO) Carriage
- 1.75" x 4" x 42" pin mounted forks
- Elec-80V (Mosfet Inverter)
- Battery (Lithium or Lead Acid)
- E-Axle HD drive axle
- 23x9-10pr single drive tires
- 18x7-8pr steer tires



GTE60

BEV - ELECTRIC LIFT TRUCK

Cap: 6K lbs (2.7K kg)
W.B.: 68.9n (1750 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 130-in Std. / 182-in Tri. mast
- 41-in Class III (ISO) Carriage
- 2" x 5" x 42" pin mounted forks
- Elec-80V (Mosfet Inverter)
- Battery (Lithium or Lead Acid)
- E-Axle HD drive axle
- 23x9-10pr single drive tires
- 18x7-8pr steer tires



GTE80

BEV - ELECTRIC LIFT TRUCK

Cap: 8K lbs (3.6K kg)
W.B.: 78.7n (2000 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 118-in Std. / 177-in Tri. mast
- 52-in Class III (ISO) Carriage
- 2" x 5" x 42" pin mounted forks
- Elec-80V (Mosfet Inverter)
- Battery (Lithium or Lead Acid)
- E-Axle HD drive axle
- 250-15pr single drive tires
- 21x8-9pr steer tires



GTZ155

BEV - ELECTRIC LIFT TRUCK

Cap: 15.5K lbs (7K kg)
W.B.: 87 in (2210 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 130-in Std. / 193-in Tri. mast
- 80-in Pin-type (ISO) Carriage
- 2.5" x 6" x 48" pin mounted forks
- 358V System
- Lithium 100 kWh
- Dana E-Axle HD drive axle
- 8.25x15-14pr tires



GTE60s

BEV - ELECTRIC LIFT TRUCK

Cap: 6K lbs (2.7K kg)
W.B.: 63.4n (1610 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 130-in Std. / 182-in Tri. mast
- 41-in Class III (ISO) Carriage
- 1.75" x 4" x 42" pin mounted forks
- Elec-80V (Mosfet Inverter)
- Battery (Lithium or Lead Acid)
- E-Axle HD drive axle
- 23x9-10pr single drive tires
- 18x7-8pr steer tires



GTE70

BEV - ELECTRIC LIFT TRUCK

Cap: 7K lbs (3.2K kg)
W.B.: 68.9n (1750 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 125-in Std. / 182-in Tri. mast
- 41-in Class III (ISO) Carriage
- 2" x 5" x 42" pin mounted forks
- Elec-80V (Mosfet Inverter)
- Battery (Lithium or Lead Acid)
- E-Axle HD drive axle
- 23x9-10pr single drive tires
- 18x7-8pr steer tires



GTE90, GTE100

BEV - ELECTRIC LIFT TRUCK

Cap: 9K lbs (4.1K kg)
Cap: 10K lbs (4.5K kg)
W.B.: 78.7n (2000 mm)

STANDARD FEATURES:

- 118-in Std. / 177-in Tri. mast
- 52-in Class III (ISO) Carriage
- 2" x 6" x 42" pin mounted forks
- Elec-80V (Mosfet Inverter)
- Battery (Lithium or Lead Acid)
- E-Axle HD drive axle
- 28x12.5-15pr single drive tires
- 21x8-10pr steer tires



GTZ180

BEV - ELECTRIC LIFT TRUCK

Cap: 18K lbs (8.2K kg)
W.B.: 98 in (2489 mm)
L.C.: 24 in (610 mm)

STANDARD FEATURES:

- 130-in Std. / 185-in Tri. mast
- 80-in Pin-type (ISO) Carriage
- 2.75" x 7" x 48" pin mounted forks
- 358V System
- Lithium 100 kWh
- Dana E-Axle HD drive axle
- 8.25x15-18pr tires

GTX Series: Electric Empty Handlers



GTX-175/6ZE

5/6-HIGH STACKING

Cap: 17.6K lbs (8K kg)
W.B.: 180 in (4572 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 5/6 High Mast
- ELME 588TB Spdr. PPS attachment
- 65kW electric traction motors
- 512V Lith-Iron-Phos 205kWh
- Dual E-Hub HD drive axle
- 14.00x24-40pr bias tires



GTX-177/8ZE

7/8-HIGH STACKING

Cap: 17.6K lbs (8K kg)
W.B.: 180 in (4572 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 7/8 High Mast
- ELME 588TB Spdr. PPS attachment
- 65kW electric traction motors
- 512V Lith-Iron-Phos 205kWh
- Dual E-Hub HD drive axle
- 14.00x24-40pr bias tires

GTEZ Series: Electric Empty Handlers



GTEZ 9.7

6/7 HIGH STACKING

Cap: 20K lbs (9.1K kg)
W.B.: 179 in (4547 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 6/7 High Mast
- ELME 588TB Spdr. PPS attachment
- 618 V Electric Motor
- CATL 350kwh Battery
- Kessler D-81 W
- 14.00x24-40pr bias tires



GTEZ 9.8

7/8 HIGH STACKING

Cap: 20K lbs (9.1K kg)
W.B.: 179 in (4547 mm)
L.C.: 48 in (1219 mm)

STANDARD FEATURES:

- 7/8 High Mast
- ELME 588TB Spdr. PPS attachment
- 618 V Electric Motor
- CATL 350kwh Battery
- Kessler D-81 W
- 14.00x24-40pr bias tires

GRZ Series: Electric Reach Stackers



GRZ-4531

5-HIGH STACKING

Cap: 99K lbs (45K kg)
W.B.: 236 in (5994 mm)

STANDARD FEATURES:

- 5-High Boom
- 2040 (ELME) spreader MPS
- 618V PMSM Traction Motor
- 423 Kwh CATL Battery (Lithium)
- Kessler D-102W HD drive axle
- 18.00x25 40pr bias tires



GRZ-4531L

5-HIGH STACKING

Cap: 99K lbs (45K kg)
W.B.: 246 in (6248 mm)

STANDARD FEATURES:

- 5-High Boom
- 2040 (ELME) spreader MPS
- 618V PMSM Traction Motor
- 560 Kwh CATL Battery (Lithium)
- Kessler D-1 02W HD drive axle
- 18.00x25 40pr bias tires

NOTES:

- 1. _____
- 2. _____
- 3. _____
- 4. _____
- 5. _____
- 6. _____
- 7. _____
- 10. _____
- 11. _____
- 12. _____
- 13. _____
- 14. _____
- 15. _____
- 16. _____
- 17. _____
- 18. _____
- 19. _____
- 20. _____
- 21. _____
- 22. _____
- 23. _____
- 24. _____
- 25. _____
- 26. _____
- 27. _____
- 28. _____
- 29. _____
- 30. _____
- 31. _____
- 32. _____
- 33. _____
- 34. _____
- 35. _____
- 36. _____
- 37. _____
- 38. _____
- 39. _____
- 40. _____

CONVERSION CHARTS:

LENGTH		
1 Yards	= 3	Foot
1 Yards	= 91.44	Centimeters
1 Foot	= 30.48	Centimeters
1 Foot	= 0.3048	Meters
1 Inches	= 2.54	Centimeters
1 Centimeters	= 0.0328084	Feet
1 Centimeters	= 0.3937008	Inches
1 Centimeters	= 0.01	Meters
1 Centimeters	= 10	Millimeters
1 Kilometers	= 3280.84	Feet
1 Kilometers	= 39400	Inches
1 Meters	= 3.28084	Feet
1 Meters	= 39.37008	Inches
1 Miles (statute)	= 5280	Feet
1 Miles (statute)	= 63400	Inches
1 Miles (statute)	= 1.609	Kilometers
1 Miles (statute)	= 1609	Meters
1 Miles (nautical)	= 6080.27	Feet
1 Miles (nautical)	= 1.853	Kilometers
WEIGHT		
1 Pound	= 0.4535924	Kilograms (kg)
1 Ounces	= 0.0625	Pounds
1 Ounces	= 0.03110348	Kilograms (kg)
1 Ounces	= 31.103481	Grams
1 Kilograms	= 32.15074	Ounces
1 Kilograms	= 2.204622	Pounds
1 Kilograms	= 0.001	Tons (metric)
1 Kilograms	= 1000	Grams
POWER		
1 BTU/Hour	= 0.0003929	Horse Power Hours
1 Kilowatts	= 1.341	Horse Power
1 Watts	= 0.00134	Horse Power
SPEED		
1 Miles/Hour	= 1.609344	Kilometers/Hour
1 Kilometers/Hour	= 0.6214	Miles/Hour
1 Feet per Hour	= 0.3048	Meters per Hour
1 Meters/Seconds	= 3.6	Kilometers/Hour
1 Knots	= 6080	Feet/Hour
1 Knots	= 1.8532	Kilometers/Hour

TEMPERATURE		
0 Celcius	= 32	Fahrenheit
100 Celcius	= 212	Fahrenheit
ENERGY		
1 BTU	= 1054.8	Joules
1 Calorie	= 4.1868	Joule
1 Joules	= 0.000948	BTU
1 Kilowatt-Hours	= 3413	BTU
1 Watt-Hours	= 3.413	BTU
AREA		
1 Acres	= 4840	Square Yards
1 Centares (centiares)	= 1	Square Meters
1 Hectares	= 2.471054	Acres
1 Hectares	= 107600	Square Feet
1 Square Feet	= 0.000023	Acres
1 Square Kilometers	= 247.1	Acres
1 Square Meters	= 0.000247105	Acres
FLOW		
1 Gallons/Minute	= 3.785412	Liters/ Minute
1 Liters/Minute	= 0.000589	Cubic Feet/Second
VOLUME		
1 Barrels (oil)	= 42	Gallons (oil)
1 Cubic Inches	= 16.38706	Cubic Centimeters
1 Liters	= 0.264172	Gallons (U.S. liq.)
1 Liters	= 1000	Cubic cm
1 Teaspoons (US)	= 0.00521	Quarts
1 Tablespoons (US)	= 0.0625	Cups
1 Tablespoons (US)	= 14.79	Milliliter
PRESSURE		
1 Atmospheres	= 10332	Kgs/sq. meter
1 Bars	= 14.5	Pounds/sq. Inch
1 Bars	= 0.9869	Atmospheres
1 Centimeters of Mercury	= 0.01316	Atmospheres
1 Inches of Mercury	= 0.03342	Atmospheres
<i>P.S.I. x 27.71 = in. H₂O P.S.I. x .0689 = bar</i>		
<i>P.S.I. x 2.036 = in. Hg P.S.I. x 68.95 = mbar</i>		
<i>P.S.I. x 2.036 = in. Hg P.S.I. x 6895 = Pa</i>		
<i>P.S.I. x 51.75 = mm/Hg P.S.I. x 6.895 = kPa</i>		
<i>P.S.I. x .0703 = kg/cm²</i>		

(°F)	(°C)	DESC.
-459.67 °F	-273.15 °C	Absolute Zero
-50 °F	-45.56 °C	
-40 °F	-40.00 °C	
-30 °F	-34.44 °C	
-20 °F	-28.89 °C	
-10 °F	-23.33 °C	
0 °F	-17.78 °C	
10 °F	-12.22 °C	
20 °F	-6.67 °C	
30 °F	-1.11 °C	
32 °F	0 °C	Freezing Water
40 °F	4.44 °C	
50 °F	10.00 °C	
60 °F	15.56 °C	
70 °F	21.11 °C	Room Temperature
80 °F	26.67 °C	
90 °F	32.22 °C	
98.6 °F	37 °C	Average Body Temp
100 °F	37.78 °C	
110 °F	43.33 °C	
120 °F	48.89 °C	
130 °F	54.44 °C	
140 °F	60.00 °C	
150 °F	65.56 °C	
160 °F	71.11 °C	
170 °F	76.67 °C	
180 °F	82.22 °C	
190 °F	87.78 °C	
200 °F	93.33 °C	
212 °F	100 °C	Boiling Water
300 °F	148.89 °C	
400 °F	204.44 °C	
500 °F	260.00 °C	
600 °F	315.56 °C	
700 °F	371.11 °C	
800 °F	426.67 °C	
900 °F	482.22 °C	
1000 °F	537.78 °C	



TAYLOR
GENUINE PARTS
 24/7 Parts Service & Support



SCAN for MORE



Taylor Machine Works, Inc.
3690 North Church Avenue, Louisville, MS 39339
Phone: 662-773-3421 - www.taylorforklifts.com

Product Line Brochure 6/26/25